

EU Declaration of Conformity No. SAR/H020



Specialist Access & Rescue
Products Ltd.

This declaration of conformity is issued by Specialist Access & Rescue Products Ltd.
Of Sarena House, Vulcan Street, Oldham, OL1 4LQ

We hereby declare that:

Equipment: V2 Sit Harness
Models: H0007, H0007QC & H0007FULLQC

is in conformity with PPE EU Regulations 2016/425, as well as the applicable requirements of
the following standards (where applicable)

Ref No.

EN12277:2015 + A1:2018 Type C Sit Harness with Maximum user weight of 150kg
EN358:2018
EN813:2024

Notified body: SGS FIMKO OY, Takomotie 8, FI-00380 Helsinki, Finland.
Notified Body No: C€ 0598

Performed the EU type examination and issued the EC type examination certificate number:

0598/PPE/26/1691

The PPE is subject to the conformity assessment procedure. Conformity to type Based on Quality Assurance of the Production Process Module D. Under the surveillance of the above Notified Body.

Signed by:

Name: Lee Allport
Position: Operations Director
Done At: SAR Products - Sarena House, Vulcan Street, Oldham, OL1 4LQ
On: 26/05/26

V2 Sit Harness

Back Attachment Point - EN358:2018
(work positioning/work restraint only)

Waist Pad

Belay Retention Loop

Belay Loop attachment point for:
Anchoring, belaying, ascending,
abseiling. EN813:2008,
EN12277-C:2015+A1:2018

Crutch System

Adjustment Buckle


Leg Loops with Padding

4 Gear Loops

Adjustment Buckle

Elastic Leg Supports

Adjustment Buckle

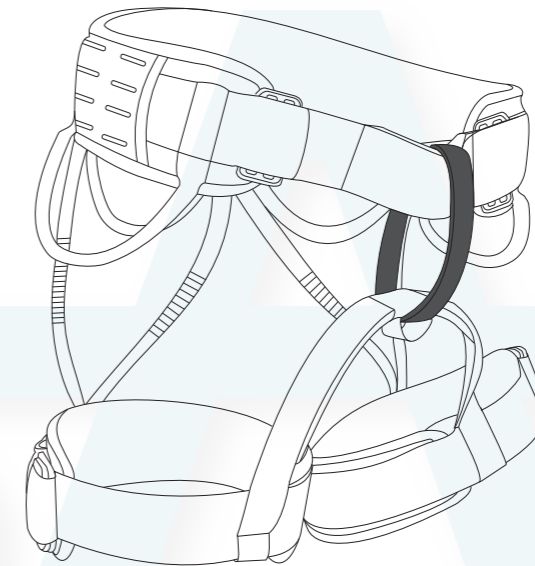

Specialist Access & Rescue
Products Ltd.

User Guide V2 Sit Harness

Conforms to:

EN358:2018, EN12277-C:2015+A1:2018 & EN813:2024


Std:	QC:	Full QC:
------	-----	----------

sar-products.com
+44 (0)161 621 0309
sales@sar-products.com



Specialist Access & Rescue
Products Ltd.

User Guide V2 Sit Harness

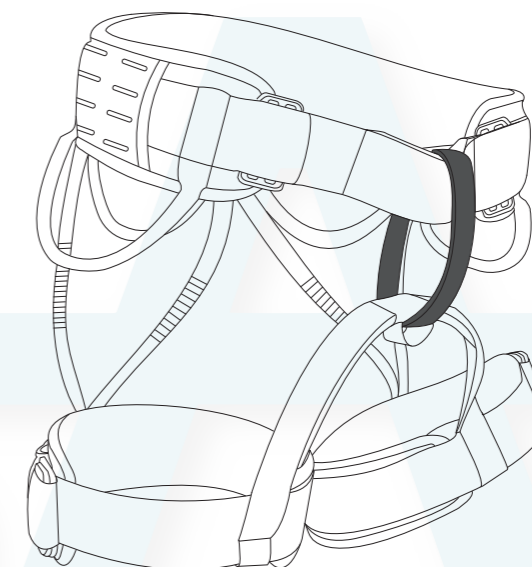

Conforms to:

EN358:2018, EN12277-C:2015+A1:2018 & EN813:2024

CE0598 UK
CA

sar-products.com
+44 (0)161 621 0309
sales@sar-products.com

Product Record

This documentation should be issued with, and kept for, each item or system. Please see the product label for the details required below. Consult this guide for advice on inspection, maintenance, lifespan, etc.

Owner / User's Name:		Date of Purchase:	
Date of Manufacture:		Date of First Used:	Product Serial No.:

Inspection & Maintenance Record

Date & Time	Type of Inspection & Comments	Name & Signature of Inspector	Next Inspection Due

Declaration Of Conformity

The EU Declaration of conformity is available by scanning the QR code or visiting - www.sar-products.com/eu-doc/



Certificate Of Conformity

We certify that the V2 Sit harness conforms to EN358:2018, EN12277-C:2015+A1:2018, and EN813:2024. The V2 Sit Harness is rated to 150kg, including tools and equipment. Other components used with this harness must conform to the relevant EN standards.

Signature:..... For SAR Products Ltd

V2 Sit Harnesses

Important

Please read and understand these instructions before use. This product should only be used by trained & competent operatives, or under the supervision of such a person.

Use

The V2 is a sit harness suitable for climbing, mountaineering, rescue, intervention, technical access, and many other potential applications.

It is the user's responsibility to ensure that any items of PPE or other equipment used with the V2 are compatible and do not interfere with the safe function of any other component. Any item of equipment used must comply to the relevant standard(s).

Note: The information in this guide meets the requirements of the EU PPE Regulation 2016/425. It is not comprehensive and cannot be substituted for the correct training, which can be provided if required. If in any doubt, contact us using the supplied information.

Safety

The safety provided by the V2 Sit Harness is dependant on the scenario, the anchors used and the skill of the user. The strength and suitability will be reduced through factors such as, but not limited to, age, wear & tear, abrasion, cuts, high impact loads, tight/sharp edges, knots, some chemicals (e.g. strong alkalis), UV exposure, environment (damp or icy conditions), failure to store & maintain as recommended, etc. An appropriate connection method must always be used between the harness and the anchor or system. The user must consult the instructions for any other components used in a fall protection or fall arrest system and must pay attention to information including fall clearance distances, etc. The V2 Sit Harness must not be used for fall arrest without appropriate additional equipment. A rescue plan should always be in place prior to any work at height. Do not alter or repair the product in any way. Any component subjected to a dynamic loading should be examined and discarded if there is any sign of defect, or any doubts about its safety. Before use for the first time, the user should carry out a comfort and adjustability test in a safe place to ensure that the sit harness is the correct size, has sufficient adjustment, and is of an acceptable comfort level for the intended use.

Lifespan

The lifespan of any product will be affected by the conditions in which it is used and stored/ maintained. This product is manufactured using high grade polyester webbing. Textile components should be retired no later than 10 years after the Date of Manufacture. Metal components will have an indefinite lifespan, depending on use. The working life will be reduced through general wear and tear, abrasion, cuts, damage to component parts, inappropriate ancillary equipment, high impact load, prolonged exposure to UV light including sunlight, elevated temperature (50° C max), exposure to some chemicals (e.g. strong alkalis) or failure to store and maintain as recommended. This list is not exhaustive.

Inspection

Before each use, conduct a visual inspection and function test to ensure the product is in serviceable condition and operates correctly. A periodic examination should be carried out at by a competent person at least every 12 months. These inspections should be recorded, paying particular attention to areas of potentially high wear such as attachment points, textiles, cams, bearings, etc. In the UK, the frequency of periodic inspection should be at least every 6 months; it is the user's responsibility to ensure they comply with the guidance for inspection in their own country or region.

Inspect as follows:

- Textiles:** Check for cuts, tears & abrasions, damage due to deterioration, contact with heat, alkalis or other corrosives, label legibility.
- Sewing:** Check for broken, cut, loose or worn threads.
- Metals:** Check for cracks, distortion, corrosion, wear by abrasion, burrs, worn or loose rivets or screws, discolouration caused by extreme heat (greater than 100° C) broken springs, seizure of moving parts, broken or missing components, marking legibility.

Immediately withdraw from service any items showing defects. Any repairs must be carried out by the manufacturer or their authorised agent.

Anchorage

Anchor points should always be assessed for strength and suitability for the task (EN795, minimum 12kN). Sharp edges, abrasive or high temperature surfaces should be avoided or protected against. Anchor points, wherever possible, should be above the user.

Cleaning

Rinse in clean cold water. If still soiled, wash in clean warm water (max. 40°C) with pure soap or a mild detergent (within pH range of 6 to 8). A machine wash may be used, but care must be taken to protect against mechanical damage, for example by placing the item in a bag prior to washing. Rinse thoroughly in clean cold water.

Maintenance

Always keep the product clean and dry. Any excess moisture should be removed with a clean cloth and then allowed to dry naturally in a warm room away from direct heat. Metal parts may be lubricated with a dry PTFE lubricant or WD40 type spray. Excess lubricant should be wiped off to avoid attracting dirt.

Chemicals

Avoid contact with any chemicals which could affect the performance of the product. If contact occurs, or is suspected, then remove the product from service immediately. If used in a marine environment, thoroughly rinse in clean cold water and dry after each use.

Storage

After cleaning, store unpacked in a cool, dry, dark place away from excessive heat sources or other possible causes of damage. Do not store wet. Transport in a suitable protective bag. If a long shelf life is required it is advisable to store in a moisture proof package.

Warning

Climbing, Work at Height, and Rescue are hazardous activities. It is the user's responsibility to ensure understanding of the correct and safe use of this equipment, to use it only for the purposes for which it is designed and to practise all proper safety procedures. The time that a casualty is suspended should be kept to a minimum. Attention should be paid to the dangers suspension trauma. The user shall ensure that the safe function of this product is not impaired by, and does not impair, the safe function of another component or system. The rear attachment point on the waist belt should not be used alone if there is a foreseeable risk of the user becoming suspended or being exposed to unintended tension by the waist belt. When using a work positioning system, the user normally relies on the equipment for support, therefore it is essential to consider the need of using a back-up. Do not use the waist attachment points for fall arrest.

Markings

- Each individual component is marked, where applicable, with:
- The name, trademark or any other means of identification provided by the manufacturer or supplier.
 - The batch or serial number
 - The date of manufacture (DoM)
 - Product description and/or reference
 - The British &/ or EN standard(s) to which the item conforms
 - Waist size
 - Load rating
 - UKCA &/or CE mark & notified body number
- Strengths quoted are when the product is tested new and are in accordance with the manufacturer's test methods to the appropriate standard. Any weights and measurements are within the standard's specified tolerances.

Notified Body:

SGS FIMKO OY, Takomotie 8, FI-00380 Helsinki, Finland.
Notified Body No: 0598

Specifications: V2 sit harness

- Fully adjustable waist and legs
- Wrap around or step in fitting
- Easy interlocking buckling system
- Laminated, high quality, sandwiched closed cell foam padding
- High quality polyester webbing, with hidden locking stitch
- Catch free gear loops 2 fixed 2 removable
- Standard Waist Size: 74cm to 115cm
- Standard Leg/Thigh Size: 44cm to 85cm
- Working Load Limit: 150kg
- Weight for Standard Harness: 914g
- Weight for QC Harness: 982g
- Weight for Full QC Harness: 1050g

It is essential for the safety of the user that if the product is re-sold outside the original country of destination the reseller shall provide instructions for use, for maintenance, for periodic examination and for repair in the language of the country in which the product is to be used.

Nothing in this document affects the consumer's statutory rights.

Fitting Instructions


Note: The following instructions enable the harness to be fitted in a wraparound manner, minimising the chances of soiling from mud, etc on the boots. However it can still be fitted without disconnecting the waist and leg buckles by stepping into the harness and adjusting the buckles.

1. Unpack the harness and lay it out so that all buckles are undone and there are no twists in the webbing.
2. Place around waist and hold in position on waist using your inner arms/elbows. **Fig. 1**
3. Bend forward and pull belay loop up through your legs using your right hand still holding waist in position. **Fig. 2**
4. Fit waist buckle as shown in Figs. A to D. Centralising position of belay to your body and adjusting to fit comfortably on waist. **Fig. 3 & 4**
5. Fasten the buckles on the leg loops and tighten for a comfortable fit - **Fig. 5**
6. Check for: no twists; all buckles are fastened correctly; tail ends are threaded back through elastic; waist belt and leg loops are tight but not uncomfortable; belay loop is central and correctly positioned - **Fig. 6**


Connectors used with the front belay loop as shown in Fig. 7 & D, must be compliant to EN362

Finally, always ask another operative to conduct a buddy check to ensure all of the above is correct before committing to height. Buckles and fit should be regularly checked during use.

V2 Fitting

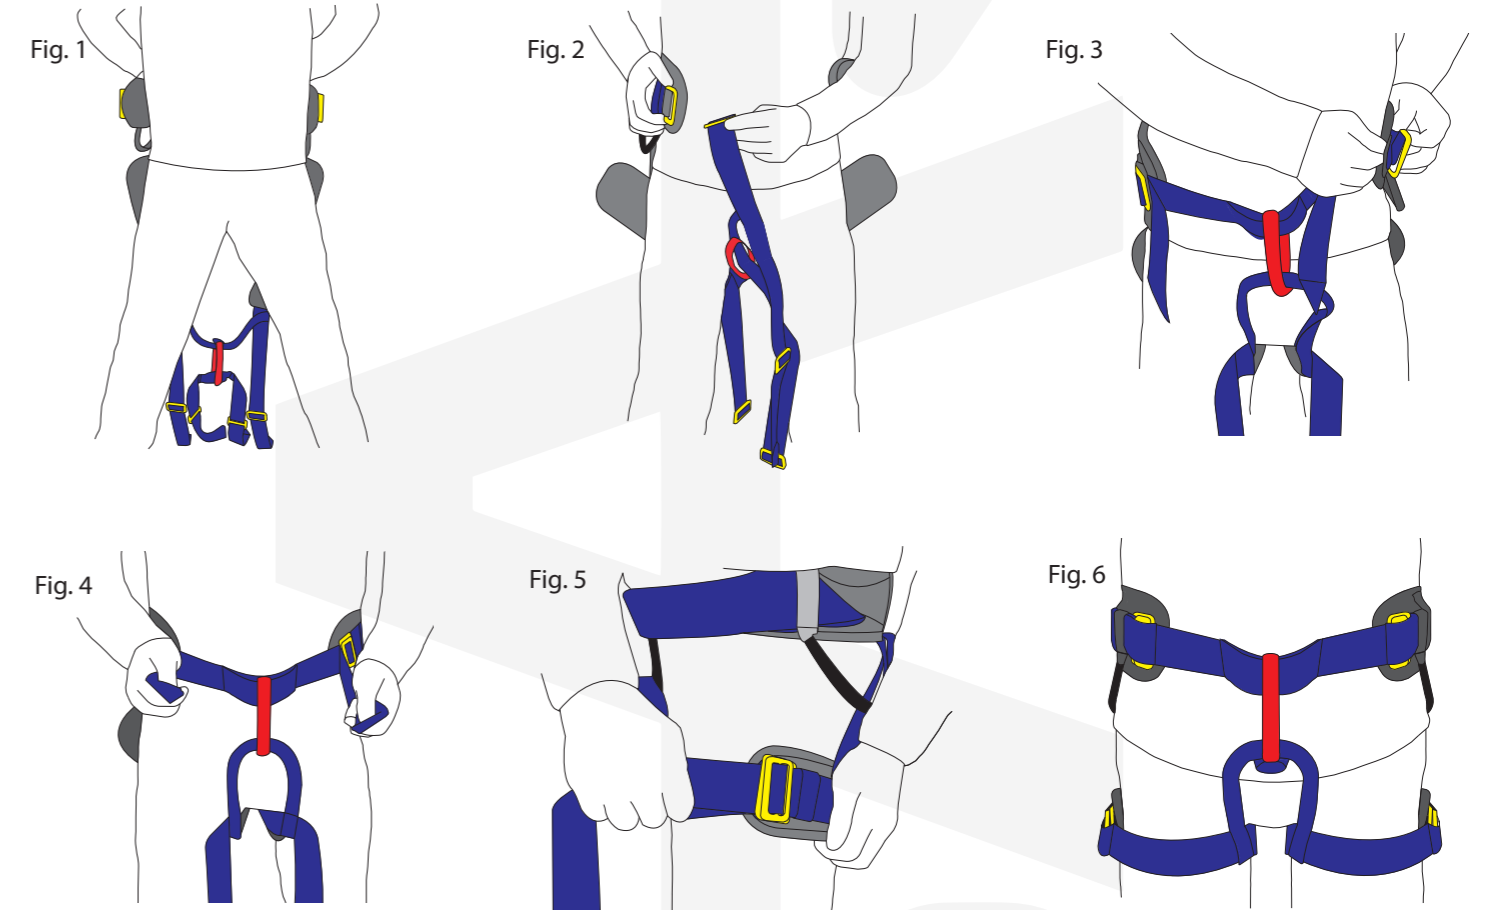

Tying into the belt and crutch system using a figure of 8 knot.

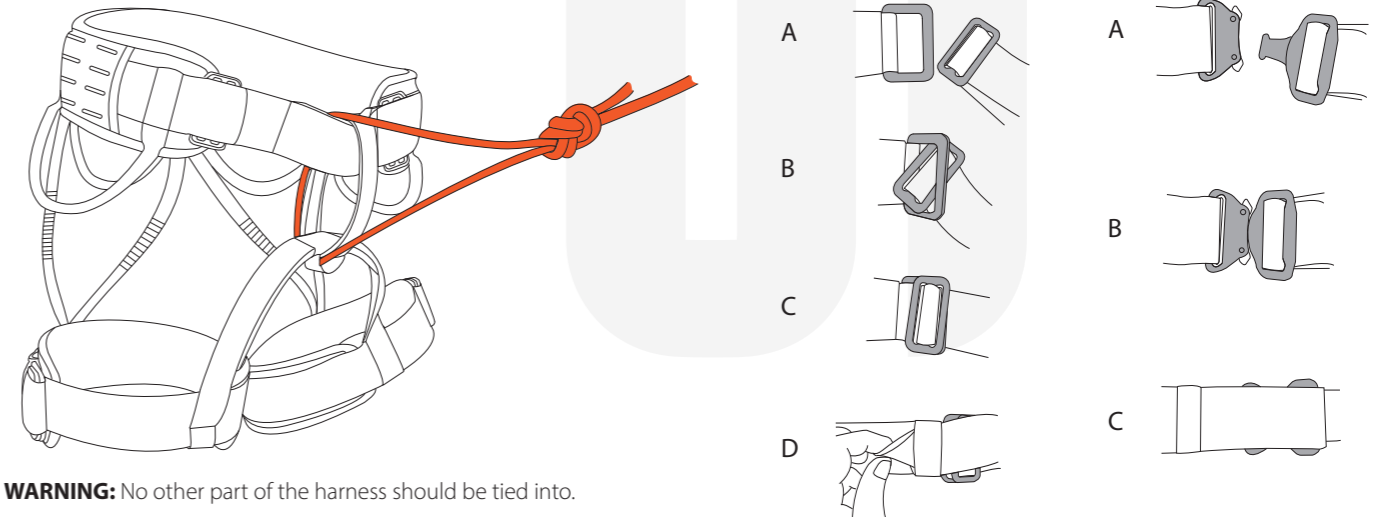

WARNING: No other part of the harness should be tied into.